

# COMTELCO

## Technical Specification

A4671B, W

746-796 MHz

LOW PROFILE MOBILE ANTENNA

**Performance:** These antennas provide unity gain in a design for heavy duty service. They have a power handling capacity of 150 watts.


**Stylish and Durable:** These antennas are manufactured using the finest materials and finishes available. The covers are molded using UV inhibited ABS plastic and are available in black or white finishes.

**Reliable:** The Chrome plated Brass base has a gold plated spring loaded contact.

**Standard Mounting:** These antennas mate with the standard TAD/NMO type mount, providing an excellent moisture seal even when the antenna is removed.



Vertical Pattern

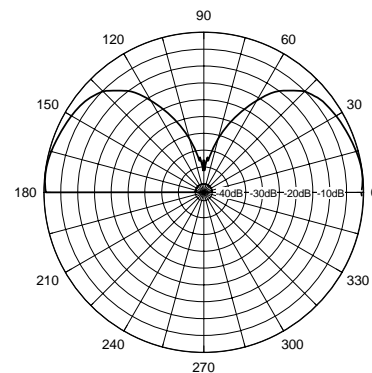

### SPECIFICATIONS:

<b>FREQUENCY RANGE:</b>	746-796MHz
<b>GAIN:</b>	Unity
<b>IMPEDANCE:</b>	50 ohms
<b>POWER RATING:</b>	150 watts
<b>VSWR:</b>	<2.0:1
<b>RADOME:</b>	UV ABS
<b>BASE:</b>	Chrome plated brass
<b>CONTACT:</b>	Gold plated spring loaded contact
<b>HEIGHT:</b>	2 5/8"
<b>DIAMETER:</b>	1.5"
<b>MOUNTING:</b>	Standard TAD/NMO type
<b>COLOR:</b>	White or Black