

COMTELCO

Technical Specification

BSAX5800-14-155

5.725-5.850 GHz 14dBi Gain 155° Sector

BASE STATION ANTENNA

Reliable Performance: Rated at 250 watts and 14dBi gain, you can expect years of continuous service. This antenna provides 155° coverage at full gain.

Rugged Construction: The radiating elements are constructed of copper & copper alloy. They are encased in a radome for total environmental protection. The assembly is designed to withstand winds of over 125 MPH.

Weatherproof: The fiberglass radome is ultraviolet inhibited. The reflector assembly is epoxy powder coated aluminum for superior weather protection.

Installation: All hardware for installation on an existing 2½" diameter mast or tower leg is supplied. The supplied mount kit consists of downtilt adjustable heavy duty aluminum V block and stainless steel V bolts.




ELECTRICAL SPECIFICATIONS:

FREQUENCY:	5.725 – 5.850 GHz
GAIN:	15dBi
VSWR:	<2:1
BANDWIDTH:	>100 MHz
FRONT TO BACK:	24 dB
POWER RATING:	250 watts
IMPEDANCE:	50 ohms
VERT BEAMWIDTH:	18°
HORIZ BEAMWIDTH:	155°

MECHANICAL SPECIFICATIONS:

RADIATOR:	Internal copper alloy elements
REFLECTOR ASSY:	Powder coated Aluminum 15" H x 10" W
RADOME:	White UV inhibited fiberglass
TERMINATION:	Female N
HEIGHT:	15"
WIDTH:	10"
WEIGHT:	3 lbs.
FLAT PLATE AREA:	.62 ft ²
WIND RATING:	125 MPH
LATERAL THRUST:	69 lbs.
MOUNTING:	Stainless V Bolts, Aluminum V Block 2 ½" Dia. Max.

Horizontal Pattern

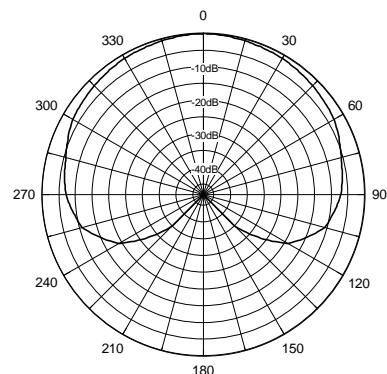

Vertical Pattern

